

UPS from 10 to 160 kVA





One range to cover every needs

MASTERYS GP4, the most advanced medium power monolithic UPS solution. With reliability engineered-in - to guarantee uptime, innovative features - to maximise energy efficiency and intelligent capability - it fits for the future.









MASTERYS GP4 Rack 10-20 kVA Internal battery



130,000+ units operating in the field



350.000 hours MTBF officially certified



application



Extended and flexible backup time

Unrivalled serviceability



Expert services

Manufacturer's maintenance for trouble-free UPS operation

Online platforms

UPS selector


Make the right UPS choice

Mobile apps

eWIRE

Tutored UPS installation






Enter just a few pieces of information:

- Load value.
- Input and output voltage.
- Back-up time.
- Spare power capacity.

By entering just a few parameters, a comparative file is generated that presents three proposals to meet your needs. The Socomec Team will then respond with a quote within 24 hours.





Once the installation is complete, eWIRE sends a detailed report to the Socomec Services Centre to validate the installation report and authorise the commissioning to be performed by the Socomec Services team.





Selection

Installation

Our service contracts are tailored to customer needs, taking into account individual operational constraints, business processes and the unique level of criticality associated with specific applications. Whatever the issue, our internal escalation process gives us access to different levels of expertise to respond as quickly as possible. Our service teams are fully trained and provided with certified equipment in order to deliver the highest levels of expertise.

How does it work?

SILVER

The ideal plan for **preventive maintenance**: inspection visits, access to the Socomec office hours hotline (8x5) and response times within 24 hours.

GOLD

Prevent and cure: this package includes everything from the Silver plan, and also covers the cost of responding to breakdowns.

PLATINUM

The PLATINIUM plan includes spare parts.

For the most critical applications, the PLATINUM+ plan comes with a 6 hour response time and 24/7 hotline.

Mobile apps

SoLive UPS

UPS status always in hand

Cloud service

SoLink

Socomec experts 24/7 UPS remote monitoring



The mobile app automatically reports the latest status of the installed UPS, displays alarms and provides instant notifications of any unexpected events.

Data provided:

- Current status of the UPS.
- Battery level.
- Battery back-up time minutes.
- UPS operating temperature.

Contact your local agent to learn more about the availability of this service.



Remote service availability by connecting your UPS to Socomec's cloud platform.

Periodic UPS health-check and customer recommendations report.

In the event of an anomaly, the system provides instant notification to the nearest Socomec Service Centre.

A specialist Service Centre engineer will carry out a proactive diagnostic check by remotely accessing the working parameters.

Troubleshooting and corrective actions can be taken immediately according to the Service Level Agreement.



Remote troubleshooting

Quick intervention via remote access.

Immediate diagnosis and root cause analysis.

Only one on-site visit is required.



Operation

Maintenance

Unrivalled power performance



MASTERYS GP4 for all your applications

- Small & Medium Data Centres
- Banks
- E-medical
- Edge data centres
- Medical devices
- Telecom & media infrastructure
- Transport
- Control rooms



Unmatched resiliency to maximise availability

- UPS architecture eliminates single point of failure associated with traditional monolithic UPS
- Fault tolerant concept provides double conversion mode redundancy to a minimum of 50% of rated power in the worst case scenario (60-160 kW models)
- Self-sufficient power bricks

- Based on our field proven medium power platform
- Limited number of power converters each designed to eliminate potential fault propagation for best MTBF
- Powerful and robust static bypass

Designed for:



Optimisation

- Compatibility with existing installation.
- Reduced footprint saving valuable space.
- Reduced rear clearance and no side clearance.



Adaptability

- Common or separate input mains.
- 3W+N / 3W input compatibility.
- TN-C / TN-S / IT / TT grounding compatible.
- IP21 degree of protection.



Flexibility

- 20+ options of brick and accessory.
- Flexible battery run-time and type.
- Parallel configuration up to 6 units.
- Easy integration into the IT LAN.

MASTERYS GP4 Rack

Tailored protection for Edge computing

Whilst organisations are outsourcing to colocation and cloud service providers, they are also investing heavily in local Edge computing to meet new and evolving requirements: data security, analytics, maintaining control of mission-critical applications, IoT development programmes and augmented reality experience.







Ultra-high reliability

- MTBF VFI > 500.000 hours.
- MTBF UPS > 12.000.000 hours.
- MTTR ≈ 30 min (compared to 6 hours with current technologies).



Engineered for easy integration


- Fits within existing 19" cabinet.
- Lithium battery option.
- Front access operation.



Front access maintenance

- Easy maintenance innovative brick swap architecture.
- Power brick replacement without rack disconnection.
- Safe guided fixing procedure.
- Minimized risk of human error.

Extended and flexible backup time*

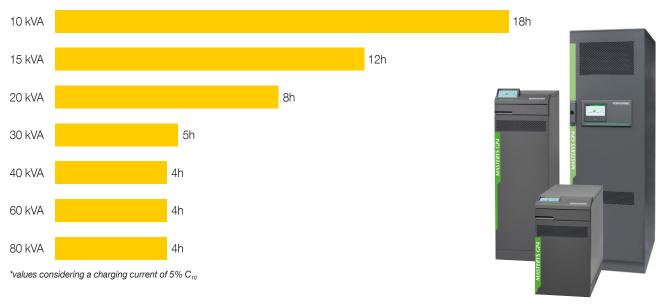

- Several optimised choices for standard internal battery configuration.
- Increased internal battery density for reduced footprint and simplified installation.
- Internal basic autonomy available up to 80 kVA without additional external battery cabinets.
- High recharging current option for very long autonomy.

Compatibility with Li-Ion battery technology for the most demanding applications


MASTERYS GP4, fully compatible with the Li-lon Battery, when connected, includes an interactive control system to check and manage all the Li-lon cells and system parameters.



Your uptime, our priority

The primary goal of every UPS system is to ensure power availability. To achieve maximum system availability, it is necessary to deliver high reliability (MTBF) and to reduce repair times (MTTR) as much as possible.

The MASTERYS GP4 range exceeds the market standard with a MTBF VFI* officially certified over 350.000 hours.

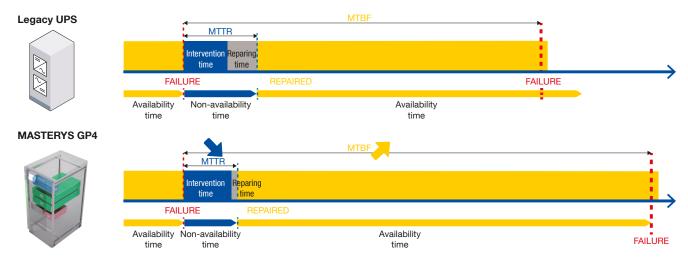

^{*} VFI (Voltage and Frequency Independent) is the only UPS working-mode that assures total load protection against all possible mains quality problems.



MASTERYS GP4 has been specifically engineered for safe and fast maintenance by advanced brick replacement – with on site repairs 5x faster than standard UPS and an enhanced First Time Fix Rate.

Seismic resistant




MASTERYS GP4 units have successfully passed several testing programs to verify their resistance to withstand seismic events.

Tests have been performed by accredited laboratories according to the standards covering zones with the highest level of seismic activity: Zone 4.

When the test has been completed, the UPS must be intact and working perfectly.



Technical data

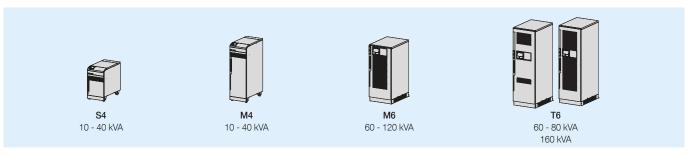

			€								
S4 10 - 40 kVA		M4 10 - 40 k	-\/Δ		M6 60 - 120 kVA			T6 60 - 80 kVA	1		
10 40 KW/		10 401	() (00 120 1071			160 kVA	`		
					MASTER	RYS GP4					
Sn [kVA]	10	15	20	30	40	60	80	100	120	160	
Pn [kW]	10	15	20	30	40	60	80	100	120	160	
Input / output 3/1	•	•	•	-	-	-	-	-	-	-	
Input / output 3/3	•	•	•	•	•	•	•	•	•	•	
Parallel configuration	up to 6 units										
Input											
Rated voltage	400 V 3ph+N (3 wire input also available on demand) 240 V to 480 V										
Voltage tolerance	240 V to 480 V										
Rated frequency					40-7	0 Hz					
Output											
Power factor	1 (according to IEC / EN 62040-3)										
Rated voltage	1ph + N: 230 V (can be configured 220/240 V) 3ph + N: 400 V (can be configured 380/415 V)										
Rated frequency	50/60 Hz										
Efficiency (Tüv süd verified)											
Double conversion VFI mode					up to 9	96,5%					
Eco Mode	up to 99%										
Battery											
Technologies					VRLA, NiCd, I	Li-Ion Batter	/				
Internal back-up time (minu	tes) ⁽¹⁾										
S4	31	19	13	7	5			-			
M4	90	57	40	24	17			-			
T6			-			11	8		-		
Environment											
Operating ambient temperature				fı	ull performand	e up to +40	°C				
UPS CABINET											
Weight			de	epends on the	number of ba	atteries insta	lled - contact	us			
Degree of protection	IP20 (IP21 on demand)										
Colours					RAL	7016					
Advanced service performa	nce										
Life extension				servic	e programme	to avoid end	l of life				
Quick repair			5 times	less MTTR th	an legacy UP	S by remova	ble front acce	ss parts			
Standards											
Safety					IEC/EN	62040-1					
EMC	IEC/EN 62040-2										
Performance	IEC/EN 62040-3										
Environmental	full compliance with the RoHS EU directive										
Seismic compliance	on demand, in accordance with the Uniform Building Code UBC-1997 Zone 4										
Product declaration	CE, EAC, UKCA										

(1) 80% of rated load PF 1.

Technical data

			MASTERYS GP4 Rac	k					
Sn [kVA]	10	15	20	30	40				
Pn [kW]	10	15	20	30	40				
Input / output 3/1	•	•	•	-	-				
Input / output 3/3	•	•	•	•	•				
Parallel configuration	up to 6 units								
Input									
Rated voltage			400 V 3ph+N						
Voltage tolerance	240 V to 480 V								
Rated frequency	40-70 Hz								
Output									
Power factor		1	according to IEC / EN 620	40-3)					
Rated voltage	1ph + N: 230 V (can be configured 220/240 V) 3ph + N: 400 V (can be configured 380/415 V)								
Rated frequency	50/60 Hz								
Efficiency (Tüv süd verified)									
Double conversion VFI mode	up to 96,5%								
Eco Mode	up to 99%								
Battery									
Technologies	VRLA, NiCd, Li-Ion Battery								
Battery type	normal life - long life								
0 " "	external								
Configuration	separated or shared								
Reliability (MTBF)									
MTBF (VFI)	> 500,000 hrs (attested)								
MTBF (UPS)			> 12,000,000 hrs (attested	d)					
Environment									
Operating ambient temperature	full performance up to +40 °C								
UPS CABINET			(without specific condition	ns)					
19" rack height			7U						
Dimensions W x D x H (mm)									
Weight	442 x 820 x 305								
Display	79 kg max ⁽¹⁾ 3.5"								
Backup battery	3.5" normal life - long life								
Degree of protection	normai iire - long iire IP20								
Colours	IP20 RAL 7016								
Advanced service performance			DAL /010						
Life extension		soni	ce programme to avoid on	d of life					
Quick repair	service programme to avoid end of life 5 times less MTTR than legacy UPS by removable front access parts								
Standards		o unico icoo ivi i I N i	namegacy oro by lefflove	abic ironi access paris					
Safety			IEC/EN 62040-1						
EMC	IEC/EN 62040-1								
Performance	IEC/EN 62040-2 IEC/EN 62040-3								
Environmental	full compliance with the RoHS EU directive								
Seismic compliance	on demand, in accordance with the Uniform Building Code UBC-1997 Zone 4								
Product declaration	CE, EAC, UKCA								
i roduct ucciaration	OL, L'AU, UNUA								

⁽¹⁾ According to the model.

Socomec: our innovations supporting your energy performance

independent manufacturer

3,900 employees

% of sales revenue dedicated to R&D

dedicated to service provision

Your power management expert



POWER SWITCHING



POWER MONITORING



POWER CONVERSION



ENERGY STORAGE



The specialist for critical applications

- · Control, command of LV facilities
- Safety of persons and assets
- Measurement of electrical parameters
- Energy management
- Energy quality
- Energy availability
- Energy storage
- Prevention and repairs

countries

- Measurement and analysis
- Optimisation
- Consultancy, commissioning and training

A worldwide presence

IZ production sites

- France (x3)
- Italy (x2)
- Tunisia • India
- China (x2)
- USA (x2)
- Canada

30 subsidiaries and commercial locations

- Algeria Australia Austria Belgium China
- Canada Dubai (United Arab Emirates) France
- Germany India Indonesia Italy Ivory Coast
- Netherlands Poland Portugal Romania Serbia
- Singapore Slovenia South Africa Spain Sweden • Switzerland • Thailand • Tunisia • Turkey • UK • USA

where our brand is distributed

HEAD OFFICE

SOCOMEC GROUP

SAS SOCOMEC capital 10582640 € R.C.S. Strasbourg B 548 500 149 B.P. 60010 - 1, rue de Westhouse F-67235 Benfeld Cedex Tel. +33 3 88 57 41 41 - Fax +33 3 88 57 78 78 info.scp.isd@socomec.com

www.socomec.com









YOUR DISTRIBUTOR / PARTNER

